


## TECHNICAL SHEET

### TYPICAL APPLICATIONS

- Kraft paper tape suitable for a **sustainable** packaging.
- Medium and heavy duty carton sealing tape.
- Suitable either with a manual dispenser or automated application.

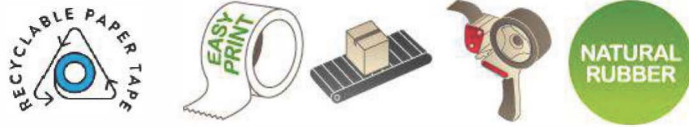

### ADVANTAGES AND BENEFITS

- FSC® MIX AEN-COC-000330 certified adhesive tape.
- Certified **recyclable**, a repulpable paper tape at the end of its usage: AENOR RP E19.01 (2020-11).
- It can be deposited into the blue paper recycling container directly for recycling.
- Excellent adhesion to all surfaces.
- **Directly printable** by flexographic printing method.
- Paper manufactured from unbleached Elementary Chlorine Free (ECF) natural pulp.

### CONSTRUCTION

- Backing: Premium FSC® certified Kraft paper.
- Adhesive: **natural rubber** from FSC® certified forestry.
- The tape core is made from 100% recycled material.
- Available in brown.



### TECHNICAL DATA

KRAFT 700	METRIC
Paper Thickness	100 Micron
Paper Weight	70 g/m <sup>2</sup>
Total Thickness	120 Micron
Peel Adhesion	2,5 N/cm
Tensile Strength	54 N/cm
Elongation at Break	6 %
Service Temperature	-35°C / +65°C



Physical and performance characteristics shown above are obtained following tests recommended by AFERA. The values given are typical values and do not constitute a specification. The user should determine whether the tape is suitable for the intended application.

### STORAGE

Tape performance is guaranteed within the first 6 months. Product must be kept in its original box and in a dry atmosphere away from direct sunlight. For product traceability, please advise the 12 digit batch number printed on labels.

### SECURITY

Product does not contain any dangerous or unhealthy components. Security data sheets are available based on directive 91/155/EC. All our tapes comply with European 2004/12/CE Packaging directive.